



Engine	Kubota D722-EF01
Rated Power	14.7 kW (19.7 hp / 20 ps) @ 3,600 rpm
Nominal Amplitude Range	0.4 mm
Vibration Frequency Range	60 Hz
Centrifugal Force Range	23.5 kN
Working Width	900 mm
Operating Weight	1,675 kg

6015E ROLLER

6015E SPECIFICATIONS >>>

ENGINE

Emission Regulation	Tier 3 / Stage III
Manufacturer	Kubota
Model	D722-EF01
Rated Power	14.7 kW (19.7 hp / 20 ps) @ 3,600 rpm
Peak Torque	45.8 N · m
Number of Cylinders	3
Aspiration	Natural
Cooling Type	Water
Displacement	0.719 L

ELECTRICAL SYSTEM

System Voltage	12V/65A
Battery	12V/60Ah

DRIVE TRAIN

Theoretical Gradeability	30%
Maximum Speed, Fwd	7 km/h
Min. Outside Turning Radius	3,500 mm

PERFORMANCE

Front Drum Static Linear Load	90 N/cm
Rear Drum Static Linear Load	93 N/cm
Number of Vibrating Drums	1
Nominal Amplitude	0.4 mm
Vibration Frequency	60 Hz
Centrifugal Force	23.5 kN
Drum Diameter	560 mm
Drum Width	900 mm
Drum Thickness	12 mm

OPERATING WEIGHT



Operating Weight	1,675 kg
Weight on Front Drum	825 kg
Weight on Rear Drum	850 kg

SERVICE CAPACITIES

Fuel Tank	23 L
Engine Oil	3.8 L
Hydraulic Oil Tank	25 L
Cooling System	5 L
Vibrating Housing	3.5×1 L
Water Tank	110 L

DIMENSIONS

A Overall Length	2,300 mm
B Overall Width	990 mm
C Compaction Width	900 mm
D Wheelbase	1,700 mm
E Steering Angle	30°
G Min. Ground Clearance	210 mm
H Overall Height	2,276 mm
Swing Angle	7±1°

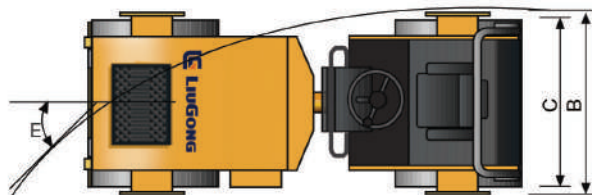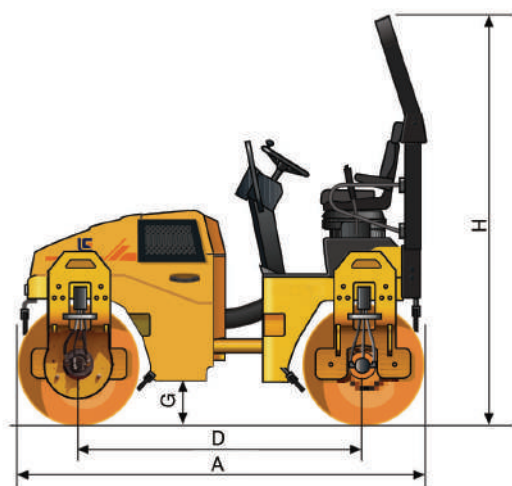

RIYADI I

Riyadh Car Park Center
Khurais Road, Al Nahdah, Riyadh 13221

JEDDAH I

Jeddah Branch
Al-Faisaliah District Mohammad Bin Majah, 2874

DAMMAM

Dammam, Sodfa District
King Faisal Road, Dammam 2933 - 7885,

Mobile: +966 50 309 1437

Website : www.asc-saudi.com