



Engine	Cummins 4BTAA3.9-C130
Rated Power	97 kW (130 hp / 132 ps) @ 2,500 rpm
Compaction Width	2,250 mm
Operating Mass	16,000 kg

6516E ROLLER

6516E SPECIFICATIONS >>>

ENGINE

Emission Regulation	Tier 2 / Stage II
Manufacturer	Cummins
Model	4BTAA3.9-C130
Rated Power	97 kW (130 hp / 132 ps) @ 2,500 rpm
Peak Torque	519 N · m
Number of Cylinders	4
Aspiration	Turbo & air-to-air aftercooled
Cooling Type	Water

ELECTRICAL SYSTEM

System Voltage	24 V
----------------	------

DRIVE TRAIN

Theoretical Gradeability	20 %
Transmission Type	Hydraulic
Working Speed	7 km/h
Travel Speed	15 km/h
Min. Outside Turning Radius	8,000 mm

STEERING

Steering System	Hydraulic
Steering Method	Articulation
Steering Angle	± 30°
Steering Relief Pressure	16 MPa

BRAKES

Service Brake Type	Hydraulic
Service Brake Actuation	Hydraulic
Parking Brake Actuation	Mechanical apply; Hydraulic release

OPTIONAL EQUIPMENT

Centralized Inflation System
Electrical Lifting System of Cab

TIRES

Tire Size	11.00-20-16PR
Tire Numbers	Front 4 Rear 5
Ground Pressure	200-400 kPa
Tire Inflation Pressure	200-800 kPa
Single Tire Load	1,778 kg
Overlapping of Front & Rear Tyre	45 mm

HYDRAULIC SYSTEM

Main Pump Type	Piston
Main Relief Pressure	16 MPa

OPERATING MASS


Max. Operating Mass	16,000 kg
Min. Operating Mass	11,000 kg

SERVICE CAPACITIES

Fuel Tank	220 L
Engine Oil	11 L
Hydraulic Oil Tank	60 L
Cooling System	22 L
Sprinkler Tank	500 L

DIMENSIONS

A Overall Length	4,800 mm
B Overall Width	2,310 mm
C Compaction Width	2,250 mm
D Tire Diameter	1,080 mm
F Wheelbase	3,600 mm
G Min. Ground Clearance	290 mm
H Overall Height	3,270 mm

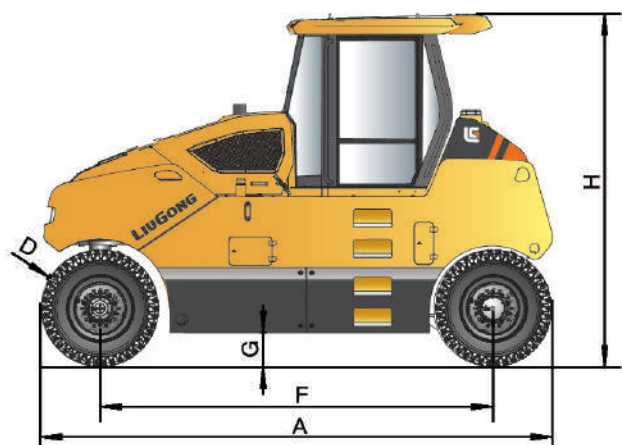

RIYADH

Riyadh Car Park Center
Khurais Road, Al Nahdah, Riyadh 13221

JEDDAH

Jeddah Branch
Al-Faisaliah District Mohammad Bin Majah, 2874

DAMMAM

Dammam, Sodfa District
King Faisal Road, Dammam 2933 - 7885,

Mobile: +966 50 309 1437

Website : www.asc-saudi.com